



## INDUTTORI FISSI CILINDRICI NUDI

1911109


Realizzabili con e senza nucleo: per telecomandi, oscillatori A Ite Frequenze, T.V., ecc.



montaggio orizzontale


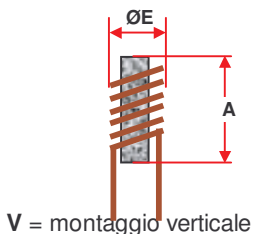


V = montaggio verticale

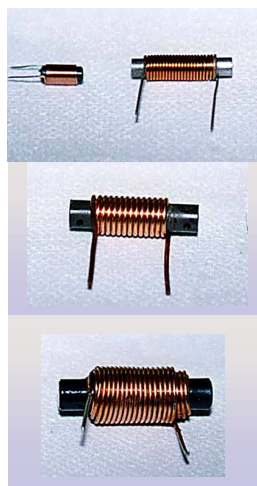

CODICE A.DI.GE.	Lo $\mu\text{H}$	R Max $m\Omega$ $\pm 5\%$	I MAX mA	ØE MAX mm	L CORPO MAX mm	ØR MAX mm	L TOT mm	PESO gr
ICi0215-103	5	50	1 KHz/V1	2,7	14	0,25	10	
ICi0308-102V	3,3	50	2000	4,5	8	0,35	6	1,2
ICi0320-10	5	50	2500	3,5	20	0,75	10	2
ICi0320-108	4	7	5000	6	20	0,9	10	
ICi0415-110	100	250	1100	7,5	15	0,35	10	
ICi0425-102	16	30	3500	6	25	0,65	10	
ICi0520-10	5	6	7500	5	20	1	10	3
ICi0520-12	7,5	22	3750	5	20	1	10	3
ICi0520-14	10	25	3750	5	20	1	10	3
ICi0525-02	5	7	7500	7,5	25	1	25	5
ICi0525-103	7,5	26	4000	8	25	0,50	30	
ICi0525-104	15	27	5000	8	25	0,85	30	
ICi0525-05	50	80	2500	7,5	25	0,75	25	5
ICi0525-105	50	50	2000	10	25	0,75	20	5
ICi0525-108	125	100	2250	10	25	0,75	25	10
ICi0525-10	200	175	1750	10	25	0,75	25	7,5
ICi0525-115	300	150	1500	10	25	0,75	10	7,5
ICi0525-121	1000	700	800	10	25	0,40	10	
ICi0525-22	1250	750	750	10	25	0,50	25	7,5
ICi0530-101	3,3	4	13000	10	30	1,8	10	
ICi0530-02	5		10000	15	30			
ICi0530-10	250	150	2500	15	30	1	10	10
ICi0530-15	300	175	2500	15	30	0,75	25	10
ICi0625-101	4,2	5	15000	10	25	1,40	10	10
ICi0630-104	10	10	10000	10	30	1,20	10	10
ICi0630-106	15	20	5000	10	30	0,90	10	10
ICi0720-103	7,5	15	4000	10	20	0,90	10	
ICi0730-125	100	50	3000	12	30	0,85	17,5	
ICi1020-05	7,5	10	10000	7,5	20	1	10	10
ICi1040-104	10	5	30000	15	40	2,0	H	15

### ICi INGUAINATE



## INDUTTORI FISSI CILINDRICI INGUAINATI

CODICE A.DI.GE.	Lo $\mu\text{H}$	R Max $m\Omega$ $\pm 5\%$	I MAX mA	ØE MAX mm	L CORPO MAX mm	ØR MAX mm	L TOT mm	PESO gr
ICi0525-104I	15	25	4000	8,5	32	0,8	102	
ICi0717-125I	100	450	1000	7	18	0,6	75	1,75
ICi1025-125I	100	175	1900	8,5	22,5	0,6	80	4,5
ICi1227-122I	750	900	750	11	25	0,6	75	5
ICi1025-123I	1.000	1100	625	11	25	0,6	75	5

## INDUTTORI FISSI CILINDRICI IN ARIA

Øi6 Sp14 0,80								
Øi6 Sp17 0,80								



A.DI.GE. S.R.L.

Via Galvani, 11 - 20095 CUSANO MILANINO  
TEL. 02 66400532 FAX 02 6193154